IM R 15 DA

ATRIUM LIFT DOUBLE ARTICULATED

OUTDOOR AND INDOOR USE

STANDARD EQUIPMENT

- Automatic outrigger leveling system
- 355° rotation (non-continuous)
- Hydraulic basket rotation - 124°
- 120V, 15 amp electric motor for indoor use
- Air / Water outlet in the platform basket
- 120V AC power to platform
- Removable wireless control box
- Tether for wired connectivity
- Max 510 lbs in basket (two person capacity)
- Three travel speeds
- Emergency hand pump
- Cylinder holding valve
- Hour meter
- Load and tip detection sensor
- Load cell
- Hydraulic jib
- Rubber tracks
- Remote battery charger
- Removable basket with 1 pin detach
- Overload sensor
- 120V battery charger
- Honda iGX390 engine
- Hydraulically adjustable track width
- Proportional controls with diagnostics

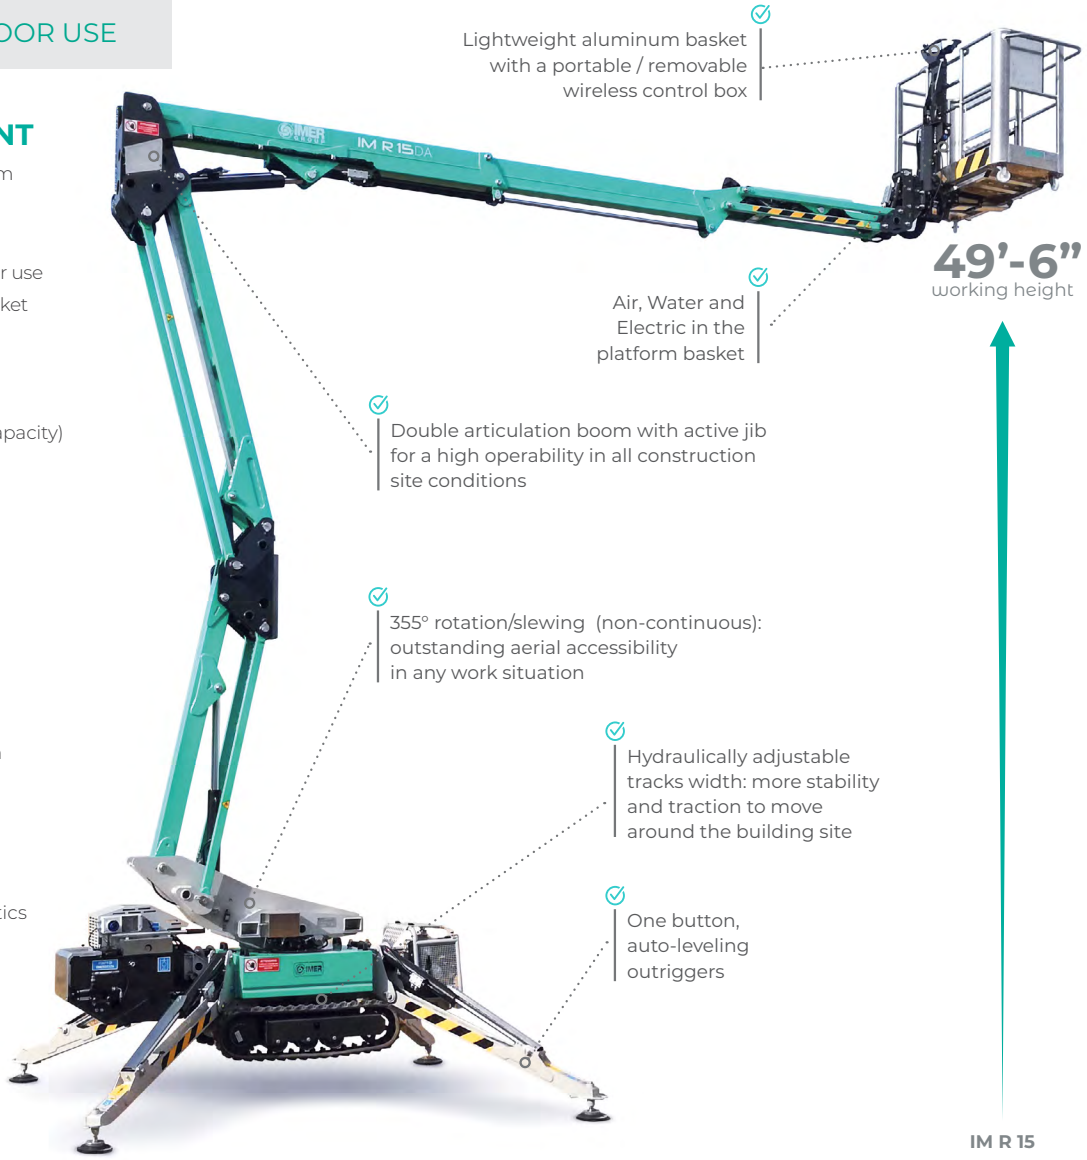

OPTIONAL EQUIPMENT

- Non-marking rubber tracks
- Working light in the platform basket
- 12 V emergency pump
- 120 V desktop remote charge
- Sliding, oversized outrigger shoes
- Oversized outrigger pads
- Double speed traction
- Aluminium basket (2' 11-½" x 2' 5")
- Aluminium basket (4' 7" x 2' 3-½")
- IMERVIEW GPS Remote Monitor System

IM R 15		
Model # (Lithium)	1128759 (1128760)	
Working height	49' 6"	15.10 m
Platform height	43'	13.10 m
Side outreach (weight in basket)	23' / 506 lbs	7.00 m / 230 kgs
Rotation (non-continuous)	355°	355°
Basket dimensions	57" x 27 1/2" x 43"	1.40 m x 0.70 m x 1.10 m
Basket rotation	124°	
Transport length (without basket)	14' 5" / 12'	4.40 m (3.65 m)
Transport width (without basket)	Min: 2' 7" / Max: 3' 5"	Min: 0.79 m / Max: 1.06 m
Height in stowed position	Min: 6' 6" / Max: 6' 11"	Min: 1.99 m / Max : 2.05 m
Overall outrigger footprint	9' 6" x 10'	2.92 m x 3.08 m
Stabilizer load	3,930 lbs	30%
Driving speed	1.12 mph	1.8 km/h
Gradeability	32%	
Platform capacity	510 lb	230 kgs
Honda GX390	13 hp	9.7 kW
Diesel L100N (optional)	8.9 hp	6.6 kW
Lithium Electric Motor (optional)	48 V / 5.4 hp AC	48 V / 4 kW AC
Machine weight (Lithium)	4,475 lbs (4,550 lbs)	2,030 kg (2,064 kg)

**w/ stabilizers in position*

Outstanding accessibility with a 355° rotation (non-continuous) and 124° jib rotation

A Honda Engine and Electric Motor provide a bi-energy solution, allowing both indoor and outdoor use

Lightweight aluminum basket options available for one or two operators

Compact 31” width allows access in narrow, hard to reach places

Easy access both outdoor and indoor. Non-marking tracks for indoor use - transport width is 41” with the tracks extended